


PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification⁵ : H03M 7/42	A1	(11) International Publication Number: WO 93/13603 (43) International Publication Date: 8 July 1993 (08.07.93)
(21) International Application Number: PCT/US92/10679 (22) International Filing Date: 14 December 1992 (14.12.92) (30) Priority data: 812,418 23 December 1991 (23.12.91) US (71) Applicant: INTEL CORPORATION [US/US]; 3065 Bowers Avenue, Santa Clara, CA 95052 (US). (72) Inventor: KEITH, Michael ; 14 Quail Drive, Holland, PA 18966 (US). (74) Agent: MURRAY, William, H.; Schnader, Harrison, Segal & Lewis, Suite 3600, 1600 Market Street, Philadelphia, PA 19103 (US).		(81) Designated States: AT, AU, BB, BG, BR, CA, CH, CS, DE, DK, ES, FI, GB, HU, JP, KP, KR, LK, LU, MG, MN, MW, NL, NO, NZ, PL, PT, RO, RU, SD, SE, UA, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, SN, TD, TG). Published <i>With international search report.</i>

(54) Title: CIRCUITRY FOR DECODING HUFFMAN CODES**(57) Abstract**

A variable-length decoder system decodes a variable-length code having different code prefixes in an input bit stream. A code prefix is located in the bit stream and used to determine a number of bits to be selected from the input bit stream according to an access of a code book. Additionally, a pointer, directing access to a different code book, may also be indicated by the access of the first code book according to the located code prefix. A determination is made in this decoder system whether to perform the operation of determining a number of bits to be selected from the input stream or accessing a second code prefix table. If the code value is valid, the number of bits is selected and appended to the code prefix to form a code word which is later decoded by the system of the present invention. If another table is indicated a further code prefix is located in the input stream and the further lookup table is accessed in accordance with the further code prefix.

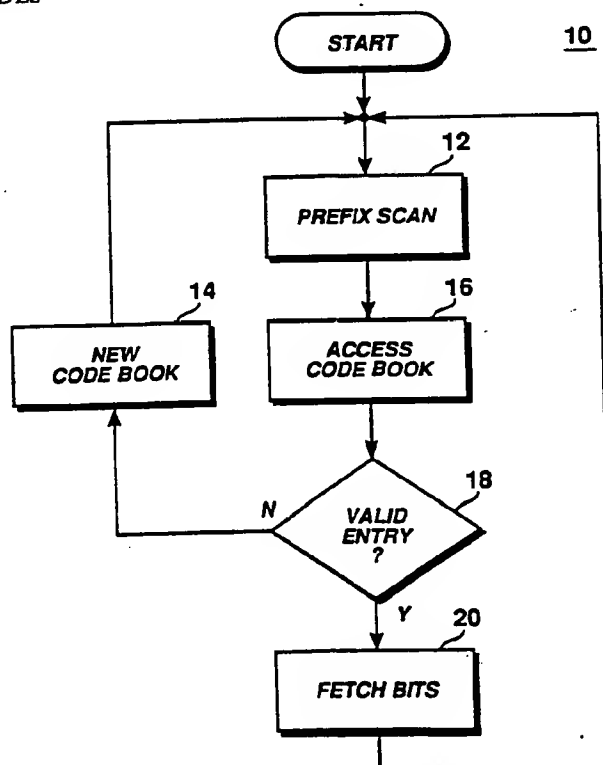

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FR	France	MR	Mauritania
AU	Australia	GA	Gabon	MW	Malawi
BB	Barbados	GB	United Kingdom	NL	Netherlands
BE	Belgium	GN	Guinea	NO	Norway
BF	Burkina Faso	GR	Greece	NZ	New Zealand
BG	Bulgaria	HU	Hungary	PL	Poland
BJ	Benin	IE	Ireland	PT	Portugal
BR	Brazil	IT	Italy	RO	Romania
CA	Canada	JP	Japan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SK	Slovak Republic
CI	Côte d'Ivoire	LJ	Liechtenstein	SN	Senegal
CM	Cameroon	LK	Sri Lanka	SU	Soviet Union
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	MC	Monaco	TG	Togo
DE	Germany	MG	Madagascar	UA	Ukraine
DK	Denmark	ML	Mali	US	United States of America
ES	Spain	MN	Mongolia	VN	Viet Nam
FI	Finland				

CIRCUITRY FOR DECODING HUFFMAN CODES

Background of The Invention

1. Field of the Invention

This invention relates to the field of circuitry for decoding variable-length encoded data and in particular to circuitry for decoding variable-length encoded data having an unrestricted set of code words.

2. Background Art

Advances in the field of digital data processing have generated a demand for systems which can transfer, process, and store relatively large amounts of digital data. It is therefore often desirable that this digital data be compressed so that it may be more efficiently transmitted and so that it may be stored in a relatively small amount of memory.

An example of a digital data processing system requiring the transfer, processing, and storage of a relatively

large volume of digital data is a video signal processing system. For example, a conventional video signal processing system may provide an image broken down into two hundred forty lines. Each line of the image may contain two hundred fifty six eight-bit independent pixel values. A video signal processing system of this type therefore requires 61,440 bytes for each image frame. Assuming an image display rate of thirty frames per second, this video processing system has a data rate of 1,843,200 bytes per second.

It is well known that the number of bytes per frame in a video signal processing system may be reduced by encoding in order to compress the video data. A prior art system of this type for encoding video data is described, for example, in U.S. Patent No. 4,125,861, entitled "Video Signal Encoding", which is incorporated by reference herein. In the video processing system described in this reference, the digital video data are first compressed using a differential pulse code modulation technique. The compressed data are then encoded using a variable-length code. In variable-length codes of this type the statistically more frequently occurring data values are assigned to the shorter code words and less frequently occurring data values are assigned to the longer code words. Thus fewer bits are required to encode the data. As used in this application, this type of encoding is referred to as statistical encoding.

One method known in the prior art for statistically encoding data in this manner is the use of an optimal variable-length code such as a Huffman code. To use a Huffman code, the data to be transmitted is put in order, from the most frequently occurring data values to the least frequently occurring ones. A Huffman code is then generated using, for example, the algorithm described at pages 77-85 of Information Theory and Coding by N. Abramson, McGraw Hill, 1963, which is incorporated by reference herein. Using this method, a code book which gives the correspondence between the data values and the code values is transmitted along with the encoded data. The transmitted code book permits the system which decodes the data to translate the code values into their corresponding data values. Because of the overhead of transmitting and storing the code book containing the encoded data this encoding technique is practical only when a relatively large amount of data is transmitted or stored.

It is well known in the art to use this statistical decoding method for codes of the form:

[11...10] [x(N) bits]

or

[00...01] [x(N) bits]

wherein N is the number of leading ones in the code prefix [11...10] or the number of leading zeros in the code prefix [00...01], and x(N) is a function of N specifying the number of

bits forming the code value which follows the code prefix. In this method statistical decoding is performed by first scanning the input bits to be decoded and locating a code prefix. For example see U.S. Patent No. 4,125,861. Then $x(N)$ additional bits are fetched according to the length N of the located prefix. The fetched $x(N)$ bits form a code value which serves as a unique index number. A unique index number indicates a data value which was previously encoded to represent one unique code in the code book. The code book may be specified by a small amount of memory containing the $x(N)$ values.

Another known for statistically encoding data is processing the data according to a predetermined algorithm to obtain data having a statistical distribution of values which generally approximates a known distribution. The data are then encoded, using a code which has been adapted for the known distribution, transmitted, and then decoded using a fixed code book which is the inverse of the code book used to encode the data values.

U.S. Patent No. 4,125,861 teaches a statistical system of this type wherein processing of data is performed to obtain a statistical distribution. Differential pulse code modulation processing is performed on input data by this system to produce data having a value distribution that has a peak at zero and falls off in a roughly exponential form on either side of the peak. These data are then statistically encoded using a preset

code book stored in a read only memory. The data are then transmitted to a receiver which decodes the data using the inverse table, also stored in a read only memory.

A statistical system of the type taught in U.S. Patent No. 4,125,861, has the advantage that it significantly compresses the input data and does not require transmission of a code book along with the compressed data. However, this type of statistical system has the disadvantage that the level of compression of the data obtained may not be as good as that which may be obtained if a more tailored statistical encoding scheme which is adapted to the data is used.

It would therefore be advantageous if a data encoding and decoding system could be provided that efficiently encoded data having a variety of statistical patterns but did not require restrictions on the permitted code book.

SUMMARY OF THE INVENTION

A variable-length decoder system decodes a variable-length code having different code prefixes in an input bit stream. A code prefix is located in the bit stream and used to determine a number of bits to be selected from the input bit stream according to an access of a code book. Additionally, a pointer, directing access to a different code book, may also be indicated by the access of the first code book according to the located code prefix.

BRIEF DESCRIPTION OF THE DRAWING

Fig. 1 shows a block diagram representation of the system for decoding Huffman codes of the present invention.

Fig. 2 shows a block diagram representation of recursive code books of the decoding system of Fig. 1.

DETAILED DESCRIPTION OF THE INVENTION

Referring generally to the drawings, there are shown variable-length statistical decoder system 10 and recursive code books 30, 40 of the present invention. Variable-length statistical decoder system 10 is adapted to permit recursive access to code books 30, 40 during the decoding of a variable-length encoded input bit stream wherein the number of code books available for access is restricted only by the amount of memory space available for storing the code books. This type of recursive access to code books 30, 40 permits an unrestricted set of code words within statistical decoder system 10.

Variable-length statistical decoder system 10 begins by scanning the encoded input bit stream until a prefix including some number of one bits followed by a zero bit has been obtained. Statistical decoder system 10 use the located code prefix to access a row in a recursive code table $x(N)$. An entry in the accessed row of the code book $x(N)$ instructs statistical decoder system 10 to either (1) fetch $x(N)$ additional bits of the

variable-length encoded bit stream input, or (2) restart scanning the input bit stream for a second variable-length code prefix in order to access a row of a further recursive code book $x'(N)$.

In the latter case, when a second variable-length code prefix is located, the accessed row of the further code book $x'(N)$ is again used to specify either (1) a fetch of $x'(N)$ additional bits from the input bit stream corresponding to the second code prefix, or (2) a further scan of the input bit stream to locate a third code prefix in order to access a third code book $x''(N)$. When this third code prefix is found, statistical decoder system 10 makes a further determination whether to (1) fetch another $x''(N)$ bits from the input bit stream or (2) to search for another code prefix for accessing a still further code book. This recursive statistical decoding process may continue for as many recursions as required.

Thus the input bit stream representing the data values which were encoded using a variable-length code are scanned and a code prefix is located as shown in prefix scan block 12 of variable-length statistical decoder system 10. When a code prefix is located in prefix scan block 12, a selected row of current recursive code book 30 is accessed according to the value of the code prefix as indicated in code book lookup block 16. Code book 30 contains the values $x(N)$ which indicate the number of bits to be fetched from the input bit stream for various values of N . A determination is thus made by statistical decoder

system 10 whether a valid value of $x(N)$ is associated with the row of recursive code book 30 accessed by the located code prefix as shown in decision diamond 18.

For example, during execution of prefix scan block 12 statistical decoder system 10 may locate a code prefix indicated as binary value 11110 in the variable-length encoded input bit stream 30. Access to code book row 34 of recursive code book 30 is then made according to located code prefix 1111 during execution of lookup block 16 as shown in code prefix field 35 of row 34. Statistical decoder system 10 of the present invention returns a $x(N)$ value of six from this lookup as shown in field 37 of row 34. Since $N(4)=6$ is a valid code, statistical decoder system 10 proceeds to code value fetch block 20 and fetches the next six bits of the variable-length encoded input bit stream and appends the fetched six bits as a code value to the located code prefix 1111. These six bits are later decoded within statistical decoder system 10.

However, if variable-length statistical decoder system 10 determines, in decision diamond 18, that the value $x(N)$ of an accessed code book row of recursive code book 30 is not valid, statistical decoder system 10 does not fetch $x(N)$ bits from the input stream. Instead, statistical decoder system 10 uses a code book pointer entry within the accessed row of recursive code book 30 to access a further recursive code book, such as recursive code book 40.

For example, if a code prefix indicated as binary value 1110 is located in prefix scanning block 12 of statistical decoder system 10, code book row 32 of recursive code book 30 is selected. The entry in field 36 of code book row 34 indicates to statistical decoder system 10 that a further recursive code book $x'(N)$ is required as indicated by pointer arrow 38. Thus, statistical decoder system 10 uses recursive code book 40 or code book $x'(N)$ for the next access as indicated in table update block 14.

After execution of table update block 14, a new code prefix is located within the encoded input bit stream as shown in prefix scan block 12. A code book row within recursive code book 40 is selected according to the newly located code prefix as shown in code book lookup block 16, and a determination is made in decision diamond 18 whether $x'(N)$ for the selected N is valid. If it is valid execution of statistical decoder system 10 proceeds to code value fetch block 20 where the $x'(N)$ value is used to select bits to be fetched from the encoded input bit stream.

It will be understood by those skilled in the art that the value of $x'(N)$ selected in recursive code book 40 by statistical decoder system 10 may indicate that a further recursive code book $x''(N)$ (not shown) should be selected rather than a fetch of $x'(N)$ bits from the input bit stream. This determination is made by decision diamond 18. For example code

book rows 42, 44 of recursive code book 40 indicate that further code books should be accessed rather than performing a fetch of the next $x'(N)$ bits of the input bit stream. If it is determined that a further recursive code book is required, in accordance with decision diamond 18, execution again proceeds to code book update block 14 where the indicated further code book becomes the current code book.

It will be further understood by those skilled in the art that recursive code book 30 may be selected by recursive code book 40. For example the $x'(N)$ entry of code book row 44 within recursive code book 40 indicates access to recursive code book 30. Additionally, it will be understood that the number of differing recursive code books which may be provided within variable-length statistical decoder system 10, for access by way of recursive code books 30, 40, is limited only by the size of the memory available to store the recursive code books.

Variable-length statistical decoder system 10 may thus be used to decode variable-length statistically encoded words of the form $[11...10] [11...10] \dots [11...10] [x(N_1, N_2, \dots, N_k) \text{ bits}]$. A polarity bit may be used to instruct decoder 10 on the form for decoding the code words. Furthermore, the complexity of the Huffman trees which can be decoded using statistical decoder system 10 is limited only by the amount of RAM provided.

While this inventions has been described with respect to specific, and particularly preferred, embodiments thereof, it

is not limited thereto and the impended claims are intended to be construed to encompass not only the specific forms and variance of the invention shown but to such other forms and variance as may be devised by those skilled in the art without department from the true spirit and scope of this invention.

CLAIMS

1. A variable-length decoder system for decoding a variable-length code having a plurality of code values representing encoded data and a plurality of differing code prefixes in a variable-length encoded input bit stream, comprising:

means for determining a first code prefix of said plurality of code prefixes in said input bit stream;

first code book means for determining a first number of first selected bits to be fetched from said input bit stream in accordance with said first code prefix;

second code book means for determining a second number of second selected bits to be fetched from said input bit stream; and,

said first code book means having first indicating means for indicating said second code book means in accordance with said first code prefix.

2. The variable-length decoder system of Claim 1, comprising means for further determining in accordance with said first code prefix whether to fetch said first selected bits from said input bit stream.

3. The variable-length decoder system of Claim 2, wherein said first selected bits comprise a code value of said plurality of code values.

4. The variable-length decoder system of Claim 1, comprising means for further determining in accordance with said first code prefix whether to access said indicated second code book means.

5. The variable-length decoder system of Claim 1, further comprising means for selecting a second code prefix of said plurality of code prefixes in said input bit stream.

6. The variable-length decoder system of Claim 5, wherein said second code book means is adapted to determine said number of said second selected bits in accordance with said second code prefix.

7. The variable-length decoder system of Claim 5, having third code book means wherein said second code book means comprises second indicating means for indicating said third code book means.

8. The variable-length decoder system of Claim 1, wherein said second indicating means further comprises means for indicating said third code book means in accordance with said second code prefix.

9. A method for variable-length decoding of a variable-length code having a plurality of code values representing encoded data and a plurality of differing code prefixes in a variable-length encoded input bit stream, comprising the steps of:

(a) determining a first code prefix of said plurality of code prefixes in said input bit stream;

(b) determining by first code book means a first number of first selected bits to be fetched from said input bit stream in accordance with said first code prefix;

(c) determining by second code book means a second number of second selected bits to be fetched from said input bit stream; and,

(d) first indicating said second code book means in accordance with said first code prefix by said first code book means.

10. The method for variable-length decoding of Claim 9, comprising the step of further determining in accordance with said first code prefix whether to fetch said first selected bits from said input bit stream.

11. The method for variable-length decoding of Claim 10, wherein said first selected bits comprise a code value of said plurality of code values.

12. The method for variable-length decoding system of Claim 11, comprising the step of further determining in accordance with said first code prefix whether to access said second code book means.

13. The method for variable-length decoding of Claim 9, comprising the further step of selecting a second code prefix of said plurality of code prefixes in said input bit stream.

14. The method for variable-length decoding of Claim 13, wherein said second code book means is adapted to determine said second number of said second selected bits in accordance with said second code prefix.

15. The method for variable-length decoding of Claim 13, in a system having third code book means further comprising the step of second indicating by said second means third of code book means in accordance with said second code prefix.

16. The method for variable-length decoding of Claim 13, wherein said second indicating means comprises means for indicating said third code book means in accordance with said second code prefix.

17. The method for variable-length decoding of Claim 15, wherein said first code book means and said third code book means are identical.


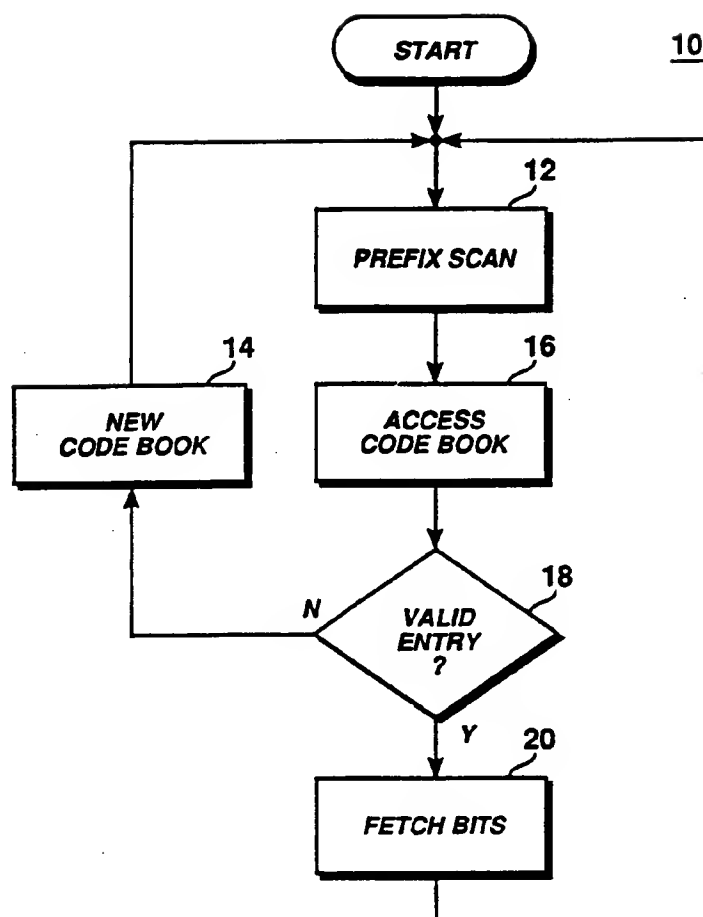


FIG. 1

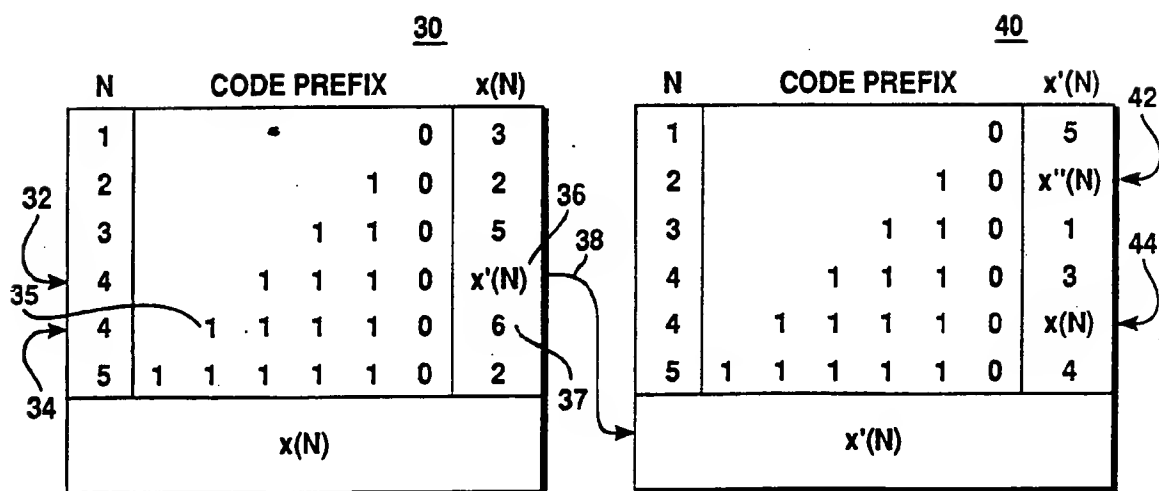

INTERNATIONAL SEARCH REPORT

PCT/US 92/10679

International Application No

I. CLASSIFICATION OF SUBJECT MATTER (If several classification symbols apply, indicate all) ⁶ According to International Patent Classification (IPC) or to both National Classification and IPC Int.Cl. 5 H03M7/42																	
II. FIELDS SEARCHED <div style="text-align: right; margin-right: 100px;">Minimum Documentation Searched⁷</div> <table style="width: 100%; border: none;"> <tr> <td style="width: 30%; border: none; padding: 5px;">Classification System</td> <td style="border: none; padding: 5px;">Classification Symbols</td> </tr> <tr> <td style="border: none; padding: 5px;">Int.Cl. 5</td> <td style="border: none; padding: 5px;">H03M</td> </tr> </table> <div style="text-align: center; margin-top: 10px;">Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched⁸</div>			Classification System	Classification Symbols	Int.Cl. 5	H03M											
Classification System	Classification Symbols																
Int.Cl. 5	H03M																
III. DOCUMENTS CONSIDERED TO BE RELEVANT⁹ <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 10%; padding: 5px;">Category¹⁰</th> <th style="width: 70%; padding: 5px;">Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²</th> <th style="width: 20%; padding: 5px;">Relevant to Claim No.¹³</th> </tr> </thead> <tbody> <tr> <td style="text-align: center; vertical-align: top; padding: 5px;">A</td> <td style="padding: 5px;">EP,A,0 286 719 (IBM) 19 October 1988 see the whole document ---</td> <td style="text-align: center; vertical-align: top; padding: 5px;">1</td> </tr> <tr> <td style="text-align: center; vertical-align: top; padding: 5px;">A</td> <td style="padding: 5px;">US,A,3 883 847 (FRANK) 13 May 1975 see the whole document ---</td> <td style="text-align: center; vertical-align: top; padding: 5px;">1</td> </tr> <tr> <td style="text-align: center; vertical-align: top; padding: 5px;">A</td> <td style="padding: 5px;">WO,A,8 905 556 (GENERAL ELECTRIC) 15 June 1989 see the whole document ---</td> <td style="text-align: center; vertical-align: top; padding: 5px;">1</td> </tr> <tr> <td style="text-align: center; vertical-align: top; padding: 5px;">A</td> <td style="padding: 5px;">EP,A,0 145 396 (CROSFIELD) 19 June 1985 see page 7, line 33 - page 8, line 21 -----</td> <td style="text-align: center; vertical-align: top; padding: 5px;">1</td> </tr> </tbody> </table> <div style="display: flex; justify-content: space-between; margin-top: 10px;"> <div style="width: 48%;"> <p>¹⁰ Special categories of cited documents:</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="width: 48%;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"A" document member of the same patent family</p> </div> </div>			Category ¹⁰	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³	A	EP,A,0 286 719 (IBM) 19 October 1988 see the whole document ---	1	A	US,A,3 883 847 (FRANK) 13 May 1975 see the whole document ---	1	A	WO,A,8 905 556 (GENERAL ELECTRIC) 15 June 1989 see the whole document ---	1	A	EP,A,0 145 396 (CROSFIELD) 19 June 1985 see page 7, line 33 - page 8, line 21 -----	1
Category ¹⁰	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³															
A	EP,A,0 286 719 (IBM) 19 October 1988 see the whole document ---	1															
A	US,A,3 883 847 (FRANK) 13 May 1975 see the whole document ---	1															
A	WO,A,8 905 556 (GENERAL ELECTRIC) 15 June 1989 see the whole document ---	1															
A	EP,A,0 145 396 (CROSFIELD) 19 June 1985 see page 7, line 33 - page 8, line 21 -----	1															
IV. CERTIFICATION <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%; padding: 5px;"> Date of the Actual Completion of the International Search <div style="text-align: center; margin-top: 10px;">12 MARCH 1993</div> </td> <td style="width: 50%; padding: 5px;"> Date of Mailing of this International Search Report <div style="text-align: center; margin-top: 10px;">19.03.93</div> </td> </tr> <tr> <td style="padding: 5px;"> International Searching Authority <div style="text-align: center; margin-top: 10px;">EUROPEAN PATENT OFFICE</div> </td> <td style="padding: 5px;"> Signature of Authorized Officer <div style="text-align: center; margin-top: 10px;">FEUER F.S.</div> </td> </tr> </table>			Date of the Actual Completion of the International Search <div style="text-align: center; margin-top: 10px;">12 MARCH 1993</div>	Date of Mailing of this International Search Report <div style="text-align: center; margin-top: 10px;">19.03.93</div>	International Searching Authority <div style="text-align: center; margin-top: 10px;">EUROPEAN PATENT OFFICE</div>	Signature of Authorized Officer <div style="text-align: center; margin-top: 10px;">FEUER F.S.</div>											
Date of the Actual Completion of the International Search <div style="text-align: center; margin-top: 10px;">12 MARCH 1993</div>	Date of Mailing of this International Search Report <div style="text-align: center; margin-top: 10px;">19.03.93</div>																
International Searching Authority <div style="text-align: center; margin-top: 10px;">EUROPEAN PATENT OFFICE</div>	Signature of Authorized Officer <div style="text-align: center; margin-top: 10px;">FEUER F.S.</div>																

**ANNEX TO THE INTERNATIONAL SEARCH REPORT
ON INTERNATIONAL PATENT APPLICATION NO.**

US 9210679
SA 68227

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information. 12/03/93

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-0286719	19-10-88	None	
US-A-3883847	13-05-75	BE-A- 827319	16-07-75
		CA-A- 1055611	29-05-79
		DE-A, C 2513862	02-10-75
		FR-A, B 2266382	24-10-75
		GB-A- 1508653	26-04-78
		JP-A- 50131726	18-10-75
WO-A-8905556	15-06-89	US-A- 4813056	14-03-89
		EP-A- 0395709	07-11-90
		JP-T- 3501555	04-04-91
EP-A-0145396	19-06-85	JP-A- 60140981	25-07-85
		US-A- 4647908	03-03-87

EPO FORM P007

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82